

# JY-922 Coin Acceptor

## Specification

**Coin Diameter** : 15mm-32mm

**Coin Thickness** : 1.2mm-3mm

**Working Voltage** : DC +12V  $\pm 10\%$

**Atmospheric Pressure** : 86Kpa—106Kpa

**Accuracy Rate of Identification** : 99.5%


**Working Humidity** :  $\leq 95\%$

**Signal Output** : pulse

**Speed** :  $\leq 0.6s$

**Working Current** : 65mA  $\pm 5\%$

## Connection and Switches

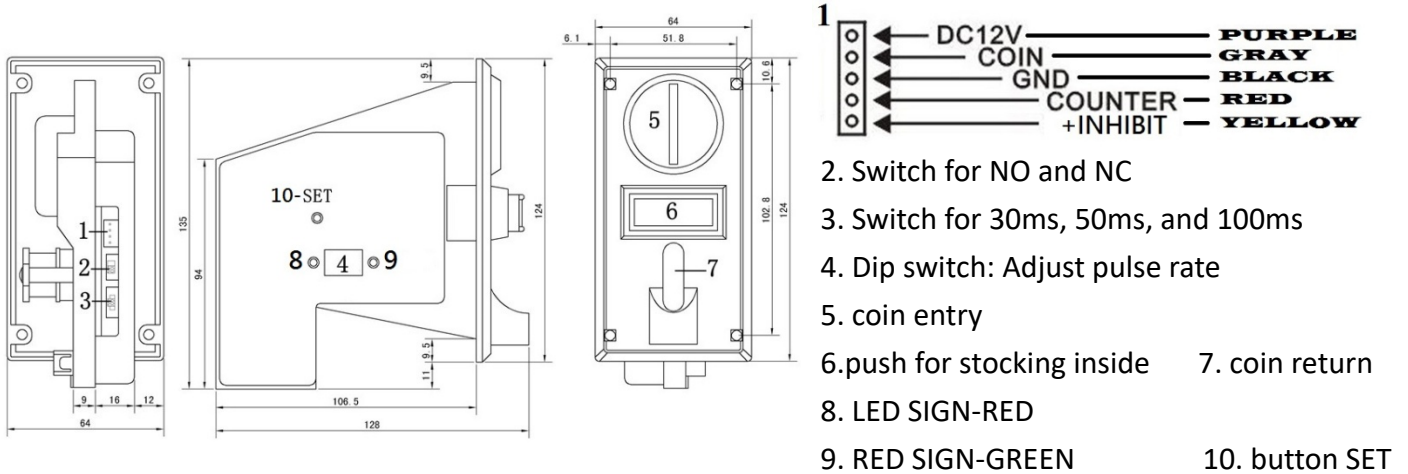

## Sample

**Note:** - Please do No.1-4 if you have 1 type of coin for sample  
 - Please do SKIP No.4 if you have 2 types of same value coin for sample.

1. Please hold on button SET for 3 seconds, LED GREEN(9) flashes.
2. Please insert coins you want to use.
3. LED SIGN-RED (8) flashes.
4. Please hold on button SET if you finish sample for your coins.
5. Please insert the other type of coin
6. Free to use after coin acceptor restarts automatically.

## Optional Function

- Please power off and switch (4) based on following table if you need to adjust output pulse rate:

| Pulse Rate | SW1 | SW2 | SW3 | SW4 | Pulse Rate | SW1 | SW2 | SW3 | SW4 |
|------------|-----|-----|-----|-----|------------|-----|-----|-----|-----|
| 1          | OFF | OFF | OFF | OFF | 6          | ON  | OFF | ON  | OFF |
| 2          | ON  | OFF | OFF | OFF | 7          | OFF | ON  | ON  | OFF |
| 3          | OFF | ON  | OFF | OFF | 8          | ON  | ON  | ON  | OFF |
| 4          | ON  | ON  | OFF | OFF | 9          | OFF | OFF | OFF | ON  |
| 5          | OFF | OFF | ON  | OFF | 10         | ON  | OFF | OFF | ON  |