


# SuperCircuit




Thank you for the purchase. Please utilize the provided bolts and nuts to install the SUPERCIRCUIT Front Strut Bar to the Toyota Hilux REVO 2.4D/ 2.8D as shown in the picture below.

STEP 1: Insert the provided bolts and nuts from both sides of the front outer wheel arches. Remove the wheel arch covers or front wheels, if necessary, to access the mounting holes.

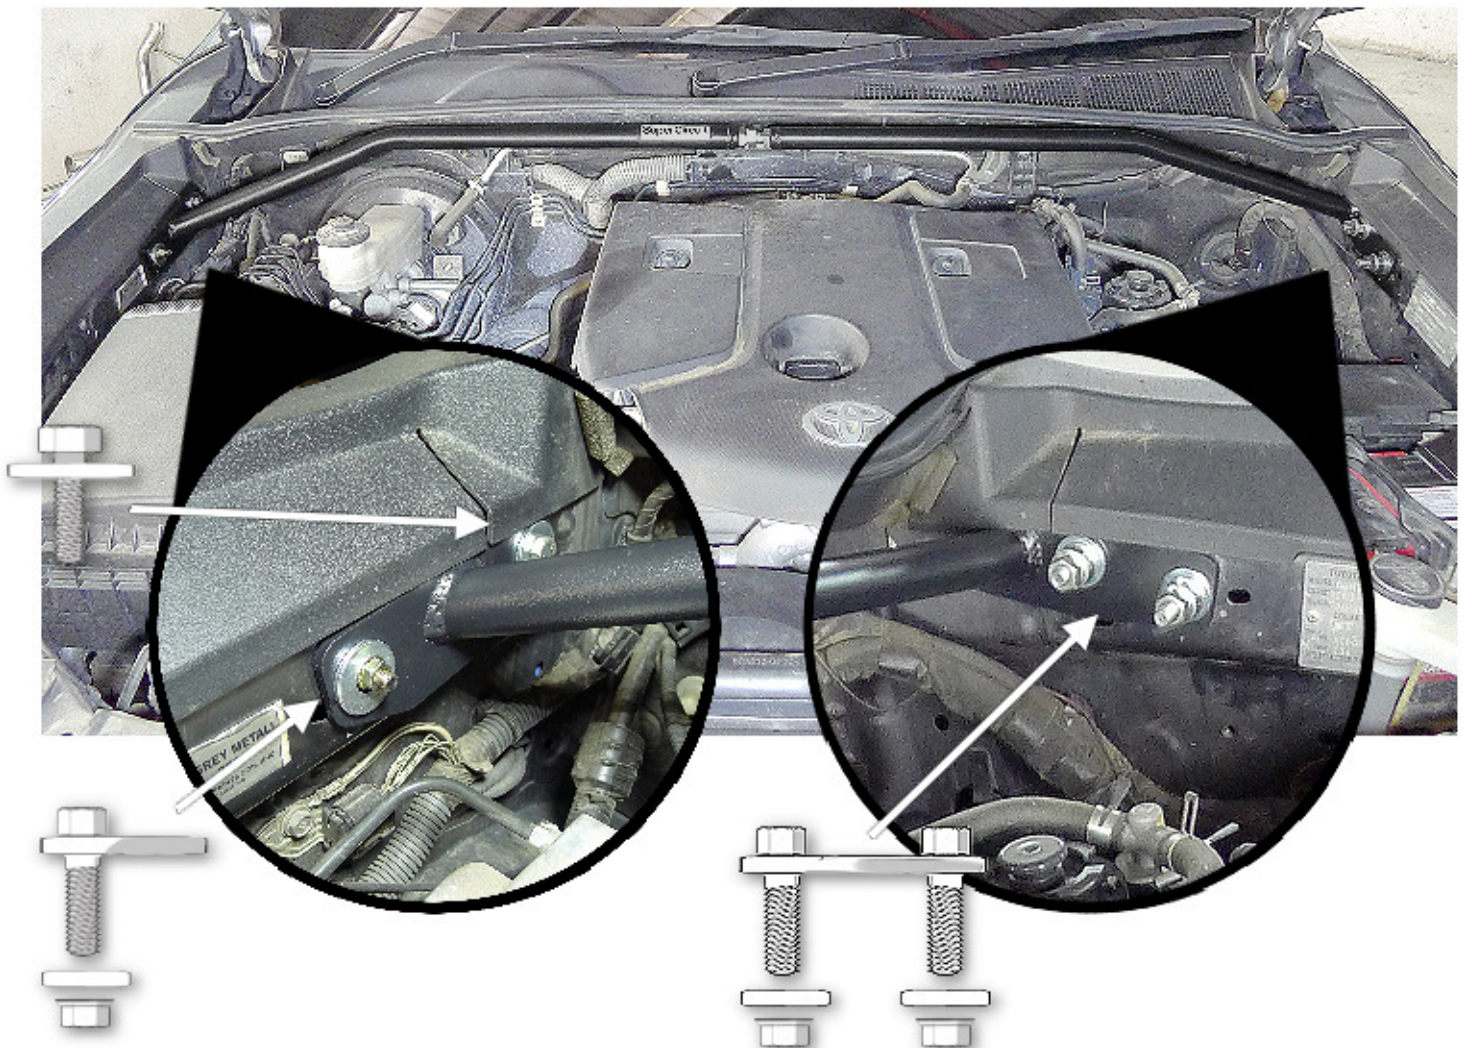

# SuperCircuit

STEP 2: Tighten the middle part of the SUPERCIRCUIT Front Strut Bar with a spanner, so that the bars are pushing outward until both ends are tight fit with the walls.

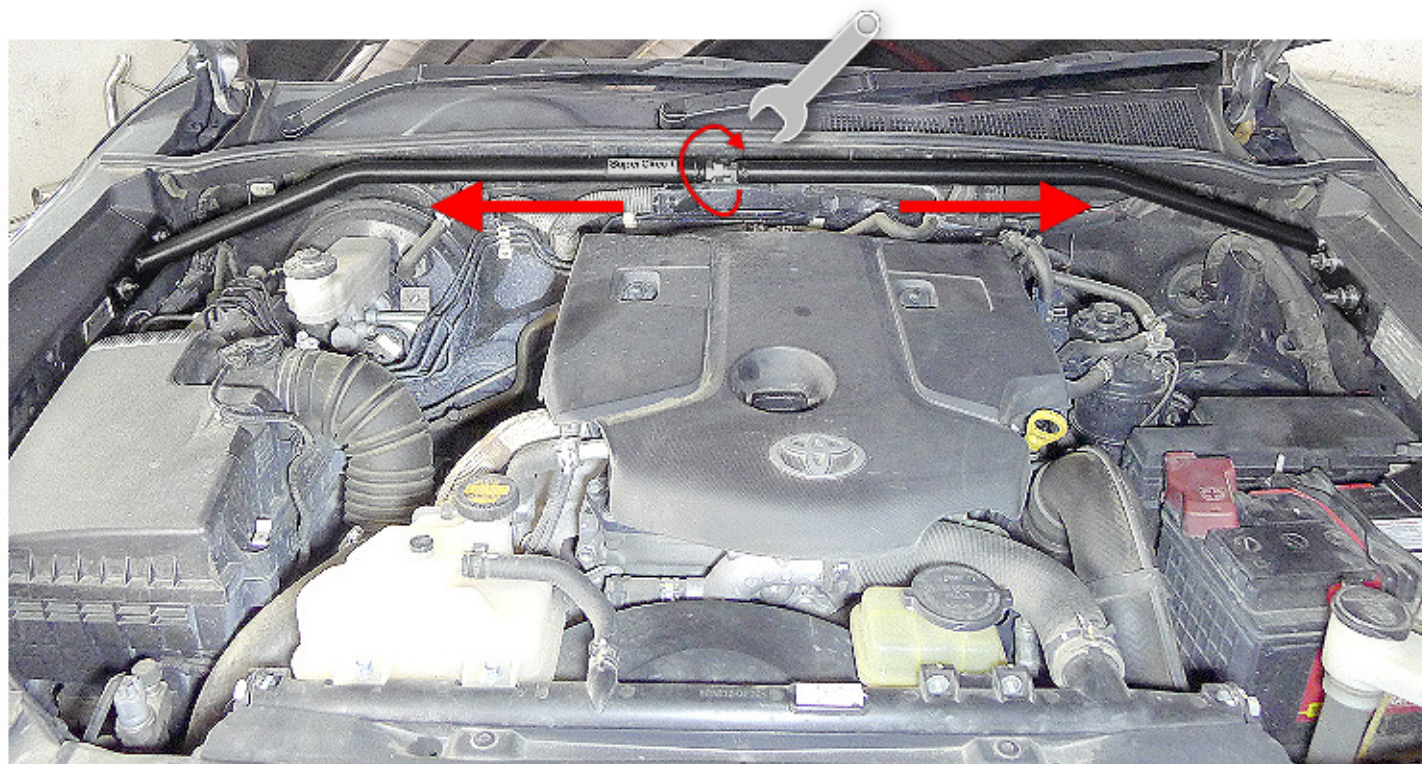

Should you need any further assistance during the installation, please contact SUPERCIRCUIT BARS, Tel: +6 03 5632 2855 or send us a message on Facebook:

<https://www.facebook.com/SuperCircuitBars>