

Spec.

Model	ANX325ST	ANX405ST	ANW355ST
Optical Spec.			
Brightness	3200	4000	3500
Display Technology	3LCD		
Contract Ratio	3000:1(with Saver mode)	15000:1(with IRIS&ECO mode)	
Resolution	XGA (1024x768)		WXGA (1280 x 800)
Lamp Consumption	Philips:218W		
Noise	ECO: MAX 34.9dB ; Normal: 38.9dB		
Lamp Life time	5000H(Normal) /10000H(ECO)		
Aspect Ratio	4:3(Standard) / 16:9 (Compatible)		16:10(Standard) / 4:3 (Compatible)
Projection Lens			
Focus	Manual		
Throw Ratio	0.46 : 1		
F	F=1.8		
f	f=6.08mm		
Screen Size	0.455~0.943m(50"~100")		0.484~1.004m(50"~100")
Generic Spec.			
Speaker	N/A	1*10W	
Scanning Frequency	Hsync Frequency 15~100KHz / Vsync Frequency 48~85Hz		
Computer Signal Input	PC,VGA, SVGA, XGA, SXGA,WXGA,UXGA,WUXGA,Mac		
Videp Compatibility	PAL, SECAM, NTSC 4.43, PAL-M, PAL-N, 480i, 480p, 576i, 576p, 720p, 1080p and 1080i		
Power Consumption	270W		
ECO Standby Mode Power Consumption	<0.5W		
Network standby Power Consumption	N/A	<3W	
Keystone Correction	V: ±30°(manual)	V: ±30°(auto+manual), H: ±15°(manual), Pincushion/Barrel Correction, Corner Keystone	
OSD(Languages)	26 languages: English, German, French, Italian, Spanish, Polish, Swedish, Dutch ,Portugese, Japanese, Simplified Chinese, Traditional Chinese, Korea, Russian, Arabic, Turkish, Finnish, Norwegian, Danish, Indonesian, Hungarian, Czech, Kazak,Vietnamese,Thai, Farsi		
Input Terminals	VGA x2, Audio in (mini jack,3.5mm) x1, YCbCr/ Component x1(share with VGA in1), Video x1;Audio in(L/R)--RCAx2, S-video x1(share with VGA in1), HDMI x2(One is Compatible with MHL), USB-Ax1 (support MemeoryViewer and WiFi Dongle(Optional)), USB-Bx1(Display), RJ45x1(Display)		
Output Terminals	VGA x1	VGA x1(Share with VGA IN 2), Audio out (mini-jack,3.5mm) x1	
Other Terminals	RS-232 x1	RS-232x1, RJ45 x1 (for control), USB-Bx1 (for up-grade), Remote Control reciver x1	
Mechanical Spec.			
Power Supply	AC 100 – 240 V ~ 50-60 Hz		
Net. Weight(KG)	4 kg		
Max Dimensions (WxHxDmm)	347(W) x 341(D) x 142(H) mm		
Standard Accessories			
Standard	Power cord, VGA cable, Remote control, Service Card, QSG(for Projector)		

*specifications subject to change without notice.

Projection distance

*All measurements are approximate and may vary from the actual sizes.

Model	Screen Size	4:3	16:9	Model	Screen Size	16:10	16:9
		Distance	Distance			Distance	Distance
ANX325ST ANX405ST	50"	0.455m	0.498m	ANW355ST	50"	0.484m	0.498m
	60"	0.552m	0.605m		60"	0.587m	0.605m
	70"	0.65m	0.711m		70"	0.692m	0.711m
	80"	0.748m	0.817m		80"	0.796m	0.817m
	90"	0.845m	0.924m		90"	0.9m	0.924m
	100"	0.943m	1.03m		100"	1.04m	1.03m



Short Throw Projector



ANX325ST/ ANX405ST/ ANW355ST

Short throw design can let the projector to be installed just above the screen. A great benefit is to allow the presenter won't need to stand in the beam of projected light and create shadows on the image.

- Powerful correction function
- Latest IRIS technology
- 3LCD color balance
- Plentiful and practical projector display modes
- Up to 10,000 hrs lamp life time(ECO)
- Available display via USB or RJ45 cable
- Short Throw Projection(0.46:1)

◆ The best choice in classroom and meeting room.

The series provides 3300lm ~ 4000lm brightness in the different XGA, WXGA, WUXGA resolution, including all the essential feature displayed in classrooms and meeting rooms.




◆ Vivid color performance and image quality.

Using with 3LCD technology, it outputs vivid color performance, exquisite picture quality with different brightness to show a clear, bright, natural images in the business presentation. It also engages teacher and students particular experience in the teaching and learning.



◆ Short Throw Distance

The teacher can stand in front of the screen while teaching and presentation, and will not be directly irradiated by the projector light beam to protect the lecturer's eyes. Throw Ratio: 80" @ 75cm (XGA) / 79cm(WXGA, WUXGA).

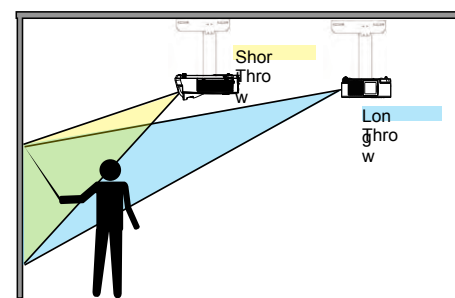

◆ New stable and long-life lamp up to 10,000 hours in ECO mode time.

Up to 10,000 hours life time (ECO mode) it can reduce the cost of replace lamp and save maintenance cost. Under the normal condition of school environment it can exceed 5 years without replace lamp.



◆ Multiple interface.


It provide not only the mainstream interface (VGA, 2-HDMI) but LAN & USB-B terminals can support any kind of signal display. USB-A (2.0) slot can support USB display it can directly project videos and pictures via USB slot.

* USB-A slot has limit with files, please make sure that the file can be read or not before use.




◆ Contrast: The latest IRIS increase the contrast.

Using the latest dynamic IRIS contrast enhancement technology, it greatly enhance the contrast ratio. Compared to traditional technology it can provide the highest 25000:1 to show the purest black, clear picture, structured and subtle image to bring superior visual impact in the presentation.

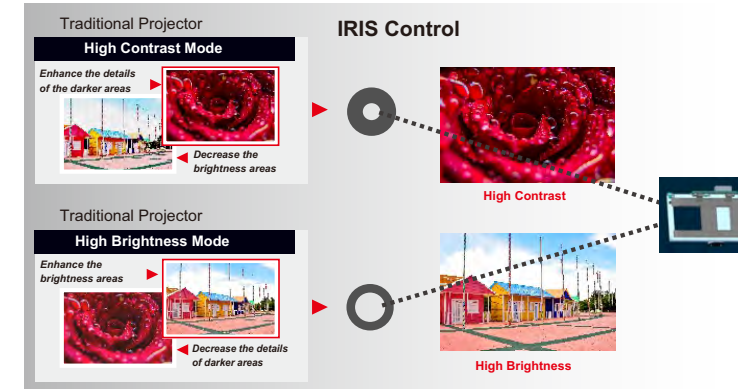

◆ Powerful correction function.

In addition to the conventional Vertical and Horizontal keystone correction, it still provides 4 Corner keystone and Pincushion, Barrel Correction for installer to install on the curve blackboard and many more non-standard surfaces. *ANWU335ST doesn't support Pincushion/Barrel Correction.

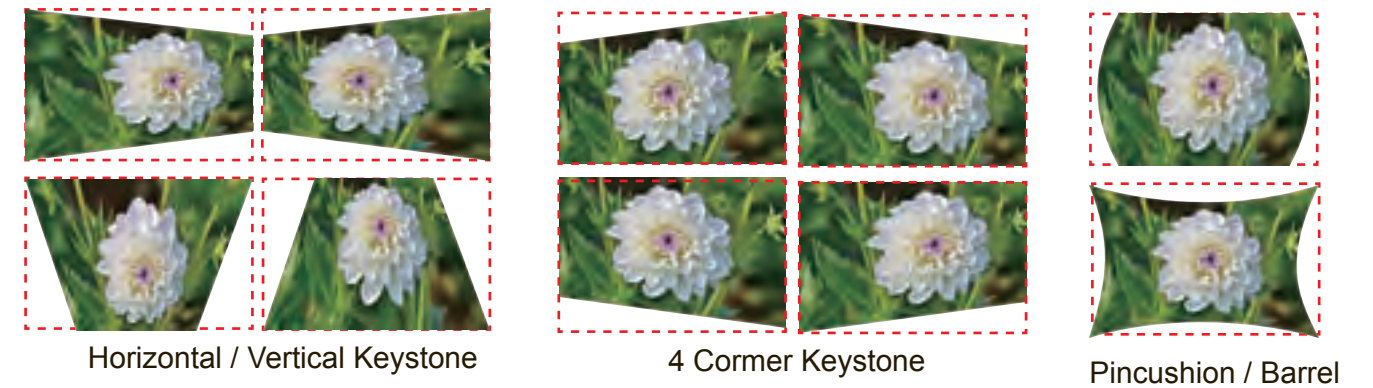

◆ Superior Dust proof design.

High efficiency ESD filter can make sure projector under the clean situation operation to extend the projector life and ensure the image quality. Projector built-in an auto-detected system, always checks the projector's air volume, and automatically detects whether the filter is blocked. It can actively give the alarm to clean up the filter message to protect the machine and improve the service life.



◆ Advanced Network projection.

**Optional function.*



It is possible via the network (wired LAN / wireless LAN) to project max 4 personal information to achieve multi-screen projection function.

- (1) Optional wireless dongle
- (2) Wired connection to hub or wireless signal to router

Download and install the "pwPresenter" application to be compatible with your OS and also connect the projector under Windows or Mac system.

