

Your First Choice Solution Provider

EMBRACING AN INVERTER PRODUCTS FOR EXCELLENT LIFESTYLE COMFORT

The intelligent IQ inverter series feature provides the exact amount of power required to provide a water to each tap or shower, from the moment it is switched on. IQ inverter designed to give you exceptional energy savings performance while ensuring you to enjoyable constant flow of water at the great pressure anytime.

With green technologies to creating outstanding benefits in IQ inverter series, it provide auto restart while after power failure and dry running protection if without water supply.

IQ inverter series are stylish and offer whisper-quiet operations, quality and reliability you can count on.

LIVING COLLECTION

居家首選好件



IQ INVERTER SERIES

24 MONTHS* WARRANTY



IQ CHLF(T)2-50

🚰 X 2 🚿 X 1

IQ CHLF(T)4-50

🚰 X 4 🚿 X 2

IQ CHLF(T)8-40

🚰 X 8 🚿 X 3

IQ CHLF(T)12-30

🚰 X 12 🚿 X 4



IQ INVERTER SERIES ADVANTAGES



QUIET OPERATION



LONGER LIFE SPAN



ENERGY SAVING



QUALITY ASSURANCE



EASY INSTALLATION



AUTO RESTART AFTER
POWER FAILURE




DRY RUN PROTECTION

TECHNICAL DATA

MODEL	INLET/ OUTLET	POWER (kW)	OUTPUT : m3/hr							
			1.0	2.0	3.5	5.0	8.0	12.0	14.0	16.0
			DISCHARGE PRESSURE : bar							
2-30PC	1" / 1"	0.37	2.65	2.2	1.55					
2-50PC	1" / 1"	0.55	4.3	3.6	2.65					
4-30PC	1 1/4" / 1"	0.55	2.8	2.7	2.48	2.05				
4-40PC	1 1/4" / 1"	0.75	3.75	3.6	3.23	2.7				
4-50PC	1 1/4" / 1"	1.1	4.7	4.5	4.04	3.4				
8-30PC	1 1/2" / 1"	1.1				2.95	2.7	2.1		
8-40PC	1 1/2" / 1"	1.5				3.9	3.5	2.75		
12-30PC	1 1/2" / 1"	1.8					3.45	2.95	2.6	2.0

TECHNICAL SPECIFICATIONS

MODEL	MAX. AMBIENT TEMPERATURE	MAX. LIQUID TEMPERATURE	MAX. OPERATING PRESSURE	RECOMMENDED FITTING
2-30PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 2 🛠 X 1
2-50PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 3 🛠 X 1
4-30PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 4 🛠 X 1
4-40PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 4 🛠 X 2
4-50PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 5 🛠 X 2
8-30PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 5 🛠 X 3
8-40PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 8 🛠 X 3
12-30PC	Up to +40°C	Up to +70°C	10 bar	🔧 X 12 🛠 X 4

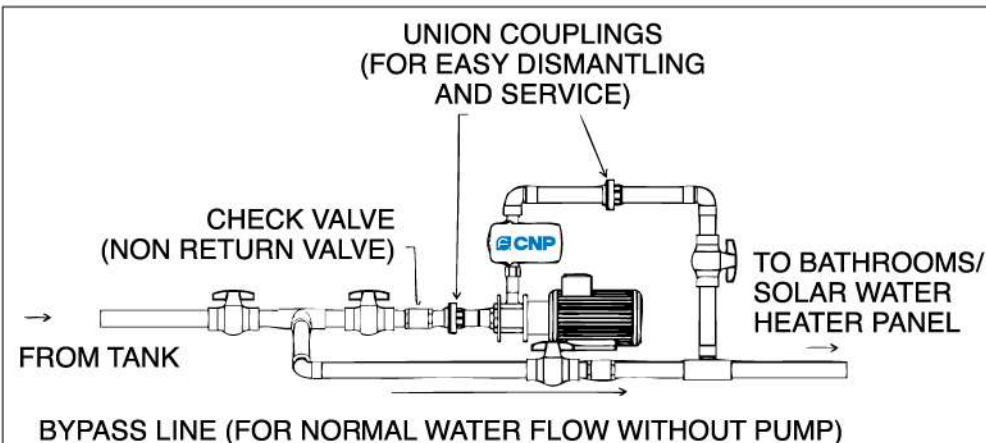

TUV NORD
GERMANY INTERNATIONAL
STANDARD CERTIFIED

