


METALLIC





Metal * Wood * Masonry Walls

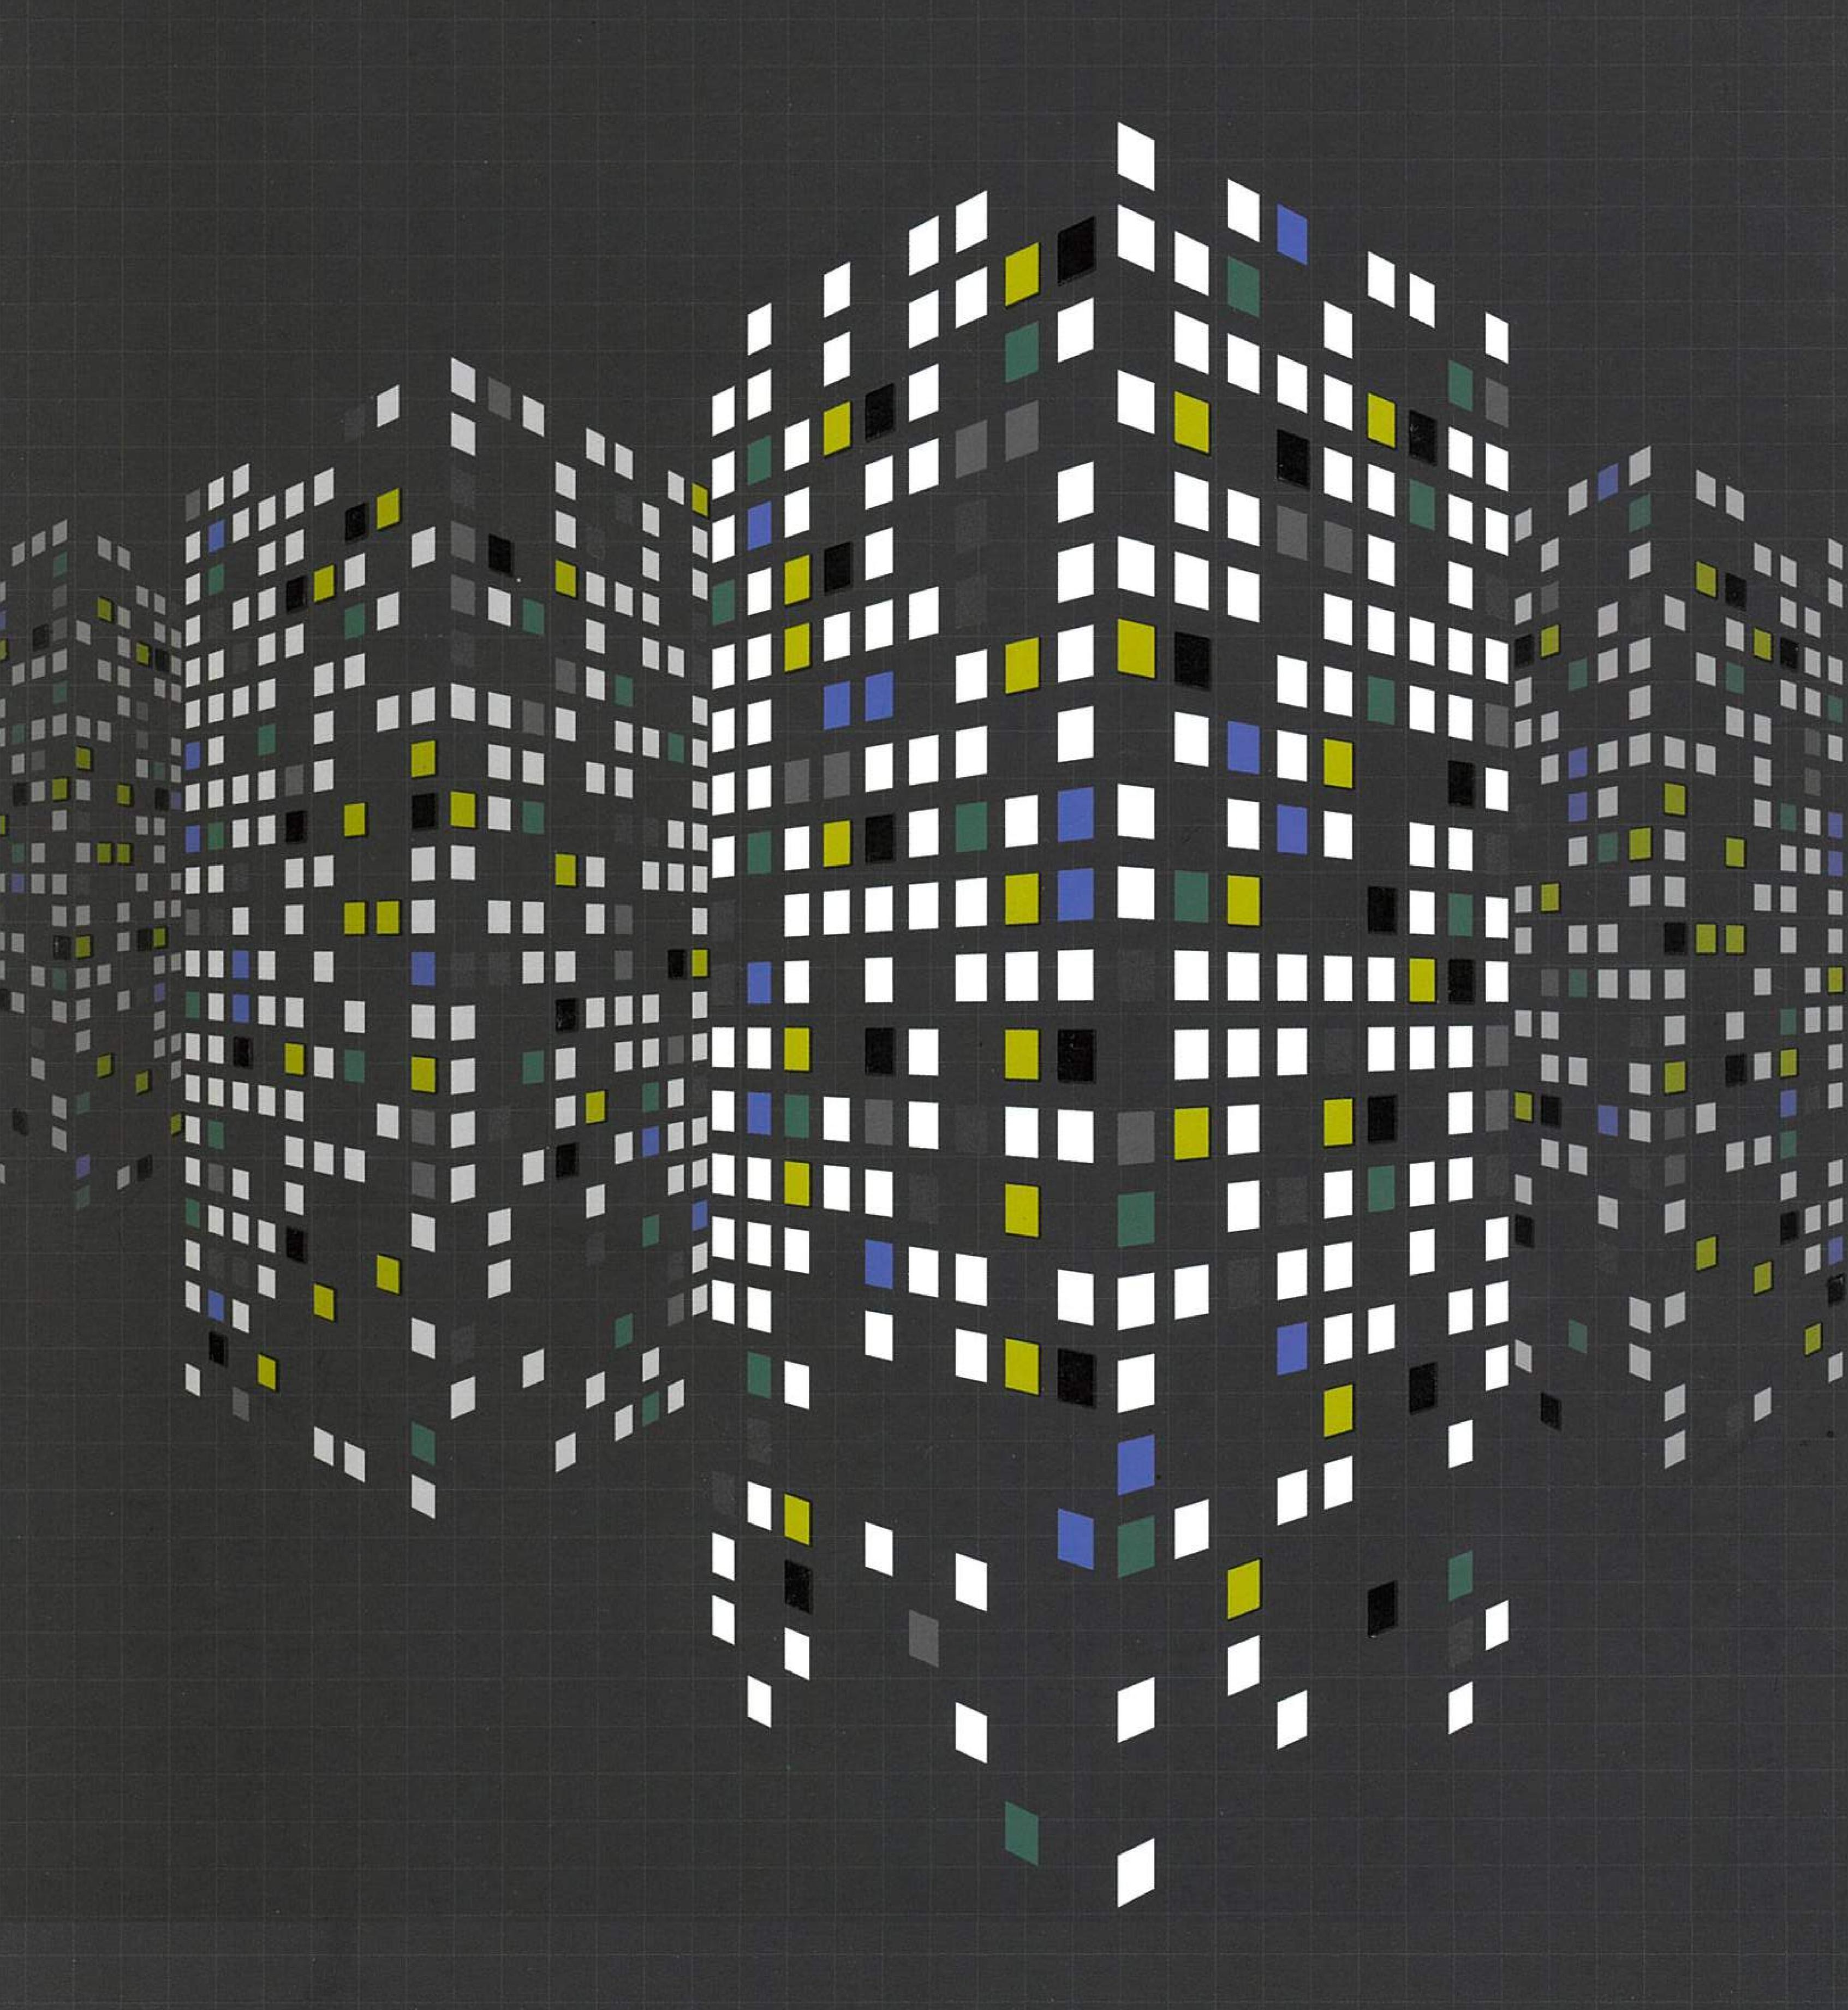



Metallic Paint

Smooth metallic shimmer sets the next level of beauty and finishing for decorative pieces.

Simply glaze on this dazzling, soft shine coat of metallic shimmer to elevate the beauty of masonry wall, wood and metal surfaces in any space. Be mesmerized by its simplicity in expressing sophistication with bold colour choices.



Smooth metallic finish



Easy application by brush / roller



For masonry wall, wood & metal

Lavender Shine

MET 005

Colour Creations®



Moonlight Green

MET 016

Sparkle Teal


MET 017

Sandy Brown

MET 020

Ebon Black

MET 021

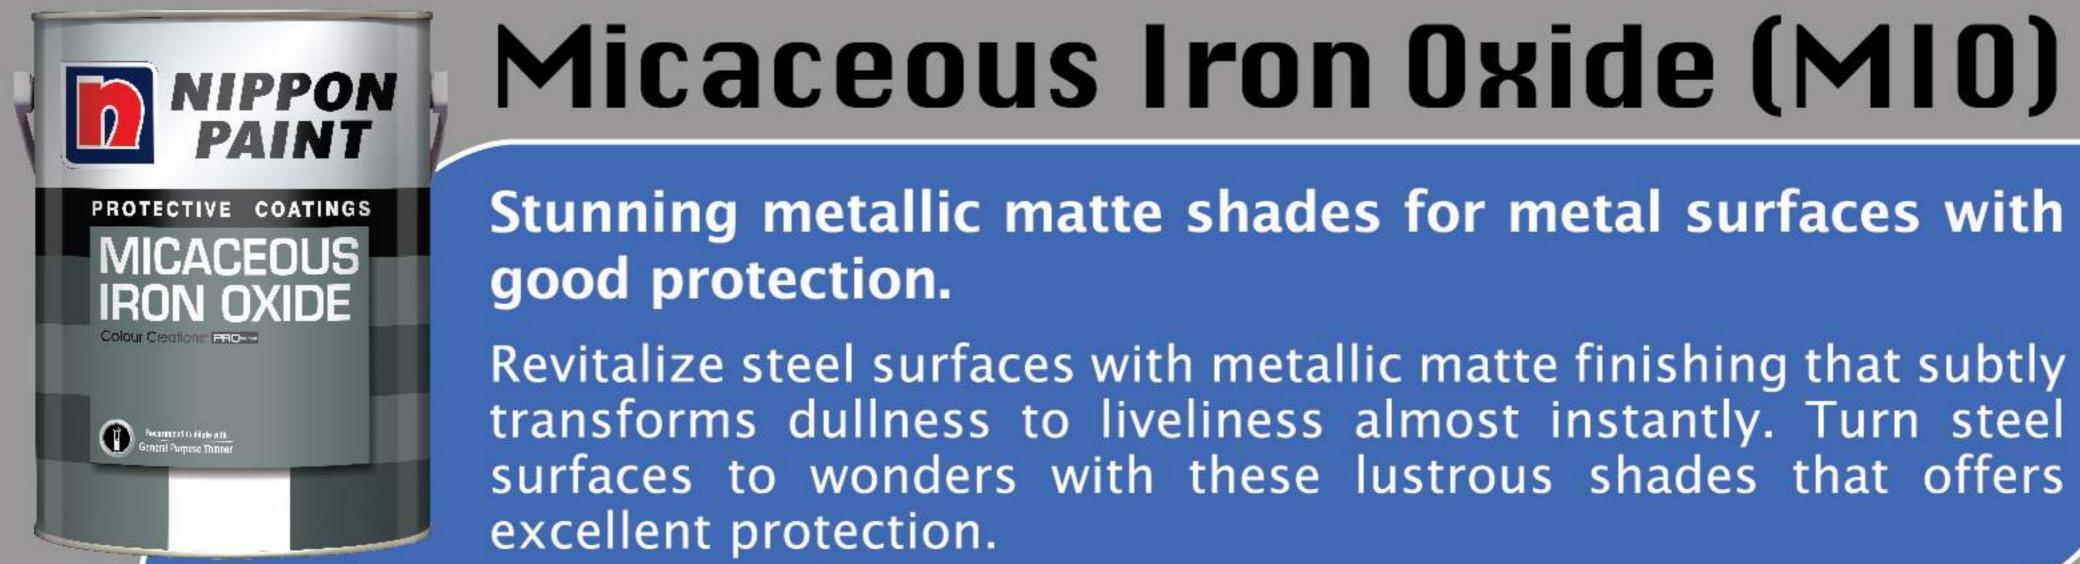

Micaceous Iron Oxide (MIO)



Chemical resistance

Stunning metallic matte shades for metal surfaces with good protection.



Weathering resistance



Good protection forsteel

Colour Creations®





Ashwood Brown 920


Muddy Brown

921



Midnight Blue 902



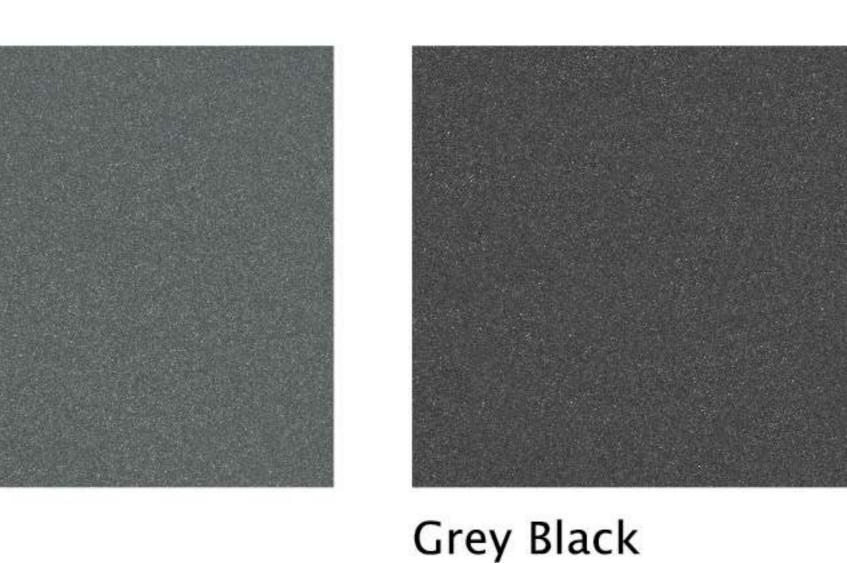

907


Brown Velvet

Spruce

304

906

Metallic Paint







Sealer / Primer

Metal

: Nippon Aquatec Red Oxide Primer

Wood

: Nippon Hydro Primer Masonry: Nippon Hydro Primer /

Nippon Vinilex 5200 Wall Sealer /

Nippon Vinilex 5400 Wall Sealer

Top Coat

Nippon Metallic Paint

2 Coats

1 Coat



Drying time

Touch Dry Hard Dry : Min 2 Hours

Recoating Interval

: 15 Minutes : 45 Minutes

Dilution

Maximum 5% dilute with Nippon Acrylic 3000 Thinner

Micaceous Iron Oxide (MIO)







Top Coat

Metal

: Micaceous Iron Oxide (MIO)

2 Coats

Drying time

Touch Dry Hard Dry

: 1 Hours : 16 Hours Recoating Interval : Min 16 Hours



Dilution

Maximum 5% dilute with Nippon General Purpose Thinner



Advisable to wear mask during painting.

