
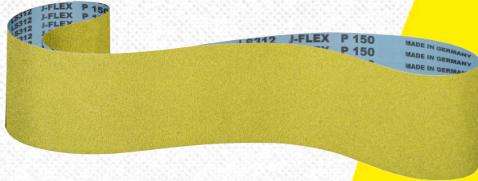


Abrasive cloth

LS 312 JF



Properties

Bonding agent	Resin
Grain	Aluminium oxide
Coating	Close
Backing	JF-cotton

Product benefit

Outstanding removal rate and service life due to active abrasive substances - Very good adaptation to radiuses and contours due to highly flexible cotton backing

Application

Stainless steel	●
Metals	●
NF metals	●
Steel	●
Wood	⦿

Applications

- ▶ Stainless steel processing industry
- ▶ Metal construction

Available grits:

16	24	30	36	40	50	60	80	100	120	150	180	220	240	280	320	360	400	500	600	800	1000	1200	1500	2000	2500	3000
----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------

Width x Length in mm	grain	type of joint	type of coat.abras.	Packing unit/pcs.	Cat. number
300 x 3500	100	F1 glued overlapped	LS 312 JF	10	79849
300 x 3500	150	F1 glued overlapped	LS 312 JF	10	247873
300 x 3500	280	F1 glued overlapped	LS 312 JF	10	79850
300 x 3500	320	F1 glued overlapped	LS 312 JF	10	83657
300 x 3500	400	F1 glued overlapped	LS 312 JF	10	81147

Klingspor Schleifsysteme GmbH und Co. KG

Hüttenstraße 36 - 35708 Haiger - Germany

Fon + 49 (0) 2773 922-0 Fax + 49 (0) 2773 922-186

sales@klingspor.de - www.klingspor.de

