

NEW FLOUR MOISTURE METER

MODEL : GMK-308



SPECIFICATIONS

Model	GMK-308
Application	Flour
Temp. Compensation	Automatic
Measuring Range	8.5% ~ 23.5%
Power Source	Battery 1.5V X 4EA
Accuracy	±0.5%
Dimensions	164(L) X 94(W) X 60(H) mm
Weight	Approx. 1.5kg

FEATURES

- Easy to Use, Compact and Quick Reading
- Electrical Resistance Method
- Test Cell Insert Type
- Non-Destructive Testing
- Average Data Available
- Battery Replacement Sign Appears
- CE Mark obtained


STANDARD ACCESSORIES

- Carrying Case 1 EA
- Test Cell 1 EA
- Cleaning Brush 1 EA
- Spoon 1 EA
- User's Manual 1 EA
- Battery 1.5V 4 EA



FLOUR MOISTURE METER

MODEL GMK-308

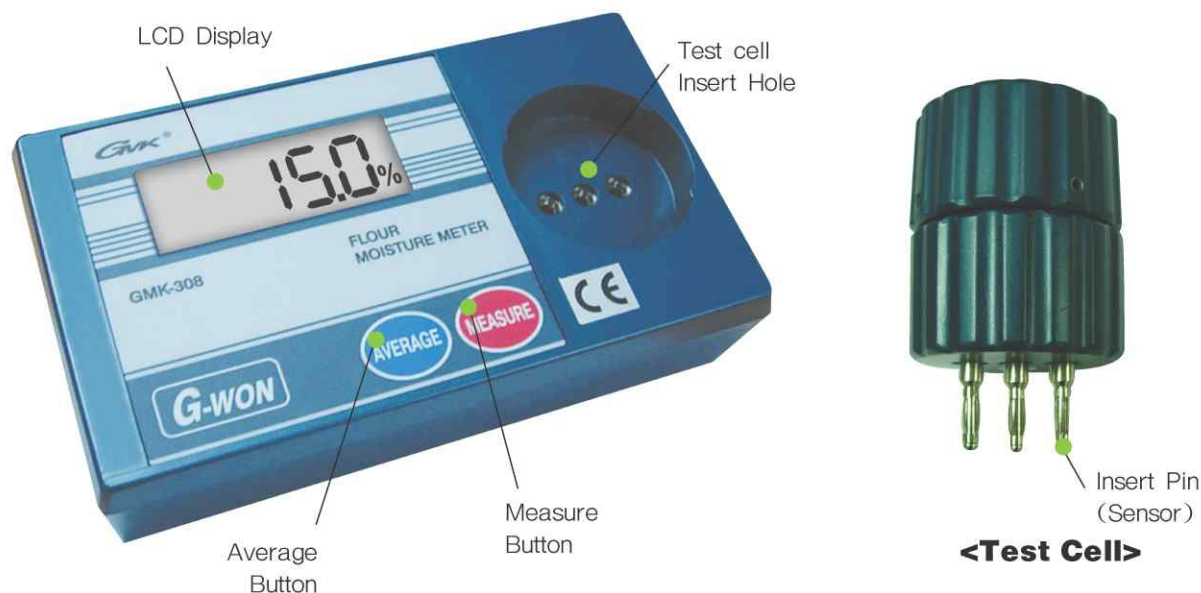

■ BEFORE MEASUREMENT

- 1) Open the cap of 'Test Cell' and make sure that it is clean and empty.
※ Do not touch insert pin with hands.
- 2) With a spoon, fill the 'Test Cell' tightly with testing sample.
- 3) Close the cap of 'Test Cell' by turning it left.
- 4) Watching insert holes carefully, place the 'Test Cell' on the instrument.

■ MEASUREMENT

- 1) Press 'Measure Button', and measurement result appears on LCD soon
- 2) Average data is available by pressing 'Average Button' (up to 9 times).
- 3) Power is off by pressing 'Average Button' twice.

■ IMPORTANT

- 1) Before every measurement, clean test cell with cleaning brush.
- 2) When the sample is out of measuring range, 'Err' sign appears.
- 3) Do not store the instrument at damp place.
- 4) In case of no use for a while, make sure to remove batteries.
- 5) The manufacturer grants a total replacement warranty of 12 months from the date of purchase.
- 6) Warranty will not be granted in case of wrong use, abuse or misuse.

ACEZ INSTRUMENTS Philippines Corporation

Unit 301-303 DMG Center, Libertad cor. Calbayog St.,
Mandaluyong City, Philippines 1553
Tel. No.: (02) 470-8068 / 69 / 71 / 72
Fax No.: (02) 470 8043
E-mail: info@acez.com.ph
www.acez.com.ph