

# DH-IPC-HDBW3241F-AS-M

2MP Lite AI IR Fixed focal Dome Network Camera



- 2MP, 1/2.8" CMOS image sensor, low illuminance, high image definition
- Outputs max. 2MP (1920 × 1080)@30 fps
- H.265 codec, high compression rate, low bit rate
- Built-in IR LED, max. IR distance: 50 m
- ROI, SMART H.264+/H.265+, flexible coding, applicable to various bandwidth and storage environments
- Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- Intelligent detection: Intrusion, tripwire
- Abnormality detection: Motion detection, video tampering, scene changing, audio detection, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
- Supports max. 256 G Micro SD card, built-in Mic
- 12V DC/POE power support
- IP67, IK10 protection
- SMD



## System Overview

With advanced deep learning algorithm, Dahua Lite AI series network camera supports some intelligent functions, such as perimeter protection and smart motion detection. It adopts starlight solution, which makes a better image effect in low illuminance.

## Functions

### Smart (H.265+ & H.264+)

Adopting advanced algorithm of auto stream control according to the environment, Dahua smart encoding technology realizes the higher efficiency than (H.265 & H.264), providing high-quality video, and reducing the cost of storage and transmission.

### Wide dynamic range (WDR)

Dahua adopts advanced Wide Dynamic Range (WDR) technology. You can get clear details in the environment of strong brightness contrast. In high brightness and back-light environment, bright region and dark region with strong light source, you can also get clear images.

### Starlight

Dahua Starlight technology mainly applies to the environment of low illumination, and it can provide clear colorful video. Even in the environment of min. illumination, the technology can guarantee the good image effect.

### Intelligent Video Analysis (IVS)

With advanced video algorithm, Dahua camera supports intelligent detection, such as tripwire and intrusion and so on.

### Smart Motion Detection (SMD)

With intelligent algorithm, Dahua Smart Motion Detection technology can effectively recognize the target types, flitting the motion detection alarm triggered by non-concerned target types. It can realize effective and accurate alarm.

### Protection (IP67, IK10, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can works normal after soaking in 1 m deep water for 30 minutes.

IK10: The enclosure can stand the punch more than 5 times from a 5 kg hammer falling from a height of 40 m (Impact energy is 20J).


Wide voltage: The camera allows  $\pm 30\%$  input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification					
Camera					
Image Sensor		1/2.8”2Megapixel progressive CMOS			
Effective Pixels		1920 (H) ×1080 (V)			
ROM		128 MB			
RAM		256 MB			
Scanning System		Progressive			
Electronic Shutter Speed		Auto/Manual 1/3 s–1/100000 s			
Min. Illumination		0.002 Lux@F1.6			
IR Distance		50 m (164.0 ft)			
IR On/Off Control		Auto/Manual			
IR LEDs Number		8 (IR LEDs)			
Pan/Tilt/Rotation Range		Horizontal: -30° to 30°; Rtation: 0° to 360°			
Lens					
Lens Type		Fixed focal			
Mount Type		M12			
Focal Length		2.8 mm; 3.6 mm; 6 mm			
Max. Aperture		F1.6			
Field of View		2.8 mm: Horizontal:106°; vertical: 57°; diagonal: 126° 3.6 mm: Horizontal:87°; vertical: 46° ; diagonal: 104° 6 mm: Horizontal:54°; vertical: 29°; diagonal: 63°			
Iris Type		Fixed aperture			
Close Focus Distance		2.8 mm: 0.6 m (2.0 ft) 3.6 mm: 1.2 m (3.9 ft) 6 mm: 2.5 m (8.2 ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8mm	38.6 m (126.6 ft)	15.4 m (50.5 ft)	7.7 m (25.3 ft)	3.9 m (12.8 ft)
	3.6mm	55.2 m (181.1 ft)	22.1 m (72.5 ft)	11.0 m (36.1 ft)	5.5 m (18.0 ft)
	6mm	82.8 m (271.7 ft)	33.1 m (108.6 ft)	16.6 m (54.5 ft)	8.3 m (27.2 ft)
Professional, Intelligent					
Perimeter Protection		Tripwire; intrusion (Recognition of human and vehicle)			
Intelligent Search		Work together with Smart NVR to perform refine intelligent search, event extraction and merging to event videos			
Video					
Video Compression		H.265; H.264; H.264H; H.264B; MJPEG			
Smart Codec		H.264: Yes H.265: Yes			
Video Frame Rate		Main stream (1920 × 1080@1–25/30 fps) sub stream(704 × 576@1–25/30 fps) third stream(1280 × 720@1–25/30 fps)			
Stream Capability		3 streams			
Resolution		1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)			
Bit Rate Control		CBR; VBR			

Video Bit Rate		H.264: 3 Kbps–8192 Kbps H.265: 3 Kbps–8192 Kbps
Day/Night		ICR auto switch
BLC		Yes
WDR		120 dB
White Balance		Auto/natural/street lamp/outdoor/manual/regional custom
Gain Control		Auto/Manual
Noise Reduction		3D DNR
Motion Detection		OFF/ON (4 areas, rectangular)
Region of Interest(Roi)		Yes (4 areas)
Smart IR		Yes
Image Rotation		0°/90°/180°/270° (Support 90°/270° with 1920 × 1080 resolution.)
Mirror		Yes
Privacy Masking		4 areas
Audio		
Built-in MIC		Yes
Audio Compression		G.711a; G.711Mu; G726; AAC
Network		
Network		RJ-45 (10/100 Base-T)
Protocol		HTTP; TCP; ARP; RTSP; RTP; UDP; RTCP; SMTP; FTP; DHCP; DNS; DDNS; PPPoE; IPv4/v6; SNMP; QoS; UPnP; NTP
Interoperability		ONVIF (Profile S/Profile G); CGI; P2P
Scene Self-adaptation		Yes
User/Host		20 (Total bandwidth: 64 M)
Edge Storage		FTP; Micro SD Card (support max. 256 G); Dahua Cloud; NAS
Browser		IE IE8, IE9, IE11 Google Firefox
Management Software		NVR; DSS; DMSS; IVSS
Mobile Phone		IOS; Android
Certification		
Certifications		CE-LVD: EN60950-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B UL/CUL: UL60950-1 CAN/CSA C22.2 No.60950-1-07
Power		
Power Supply		12V DC/POE
Power Consumption		<5.7W
Environment		
Operating Conditions		-40°C to +60°C (-40°F to +140°F)/less than≤95%
Strorage Conditions		-40°C to +60°C (-40°F to +140°F)
Ingress Protection		IP67; IK10

## Structure


Casing	Metal + Plastic
Dimensions	55 mm × Φ108.9 mm (2.2" × Φ4.3")
Net Weight	380 g (0.8 lb)
Gross Weight	520 g (1.1 lb)

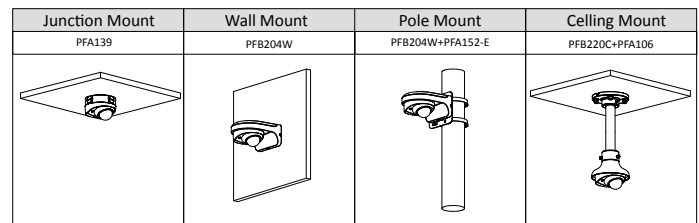

## Ordering Information

Type	Part Number	Description
2MP Camera	DH-IPC-HDBW3241FP-AS-M	2MP Lite AI IR Fixed focal Dome Network Camera, PAL
	DH-IPC-HDBW3241FN-AS-M	2MP Lite AI IR Fixed focal Dome Network Camera, NTSC
Accessories (optional)	PFA139	Junction Box
	PFB204W	Wall Mount
	PFA152-E	Pole Mount
	PFB220C	Mount Adapter
	PFA106	Ceiling Mount
	PFM321D	DC12V1A Power Adapter
	LR1002-1ET/1EC	Single-port Long Reach Ethernet Over Coax Extender
	PFM900-E	Integrated Mount Tester
	PFM114	TLC SD Card

## Dimensions (mm[inch])

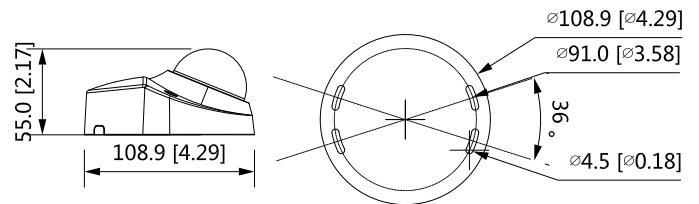

## Accessories

### Optional:



PFA139  
Junction Box



PFB204W  
Wall Mount



PFA152-E  
Pole Mount



PFB220C  
Ceiling Mount



PFA106  
Mount Adapter



PFM321D  
DC12V1A Power  
Adapter



LR1002-1ET/1EC  
Single-port long  
reach ethernet over  
coax extender



PFM900-E  
Integrated Mount  
tester



PFM114  
TLC SD card